


FreeSpeak II 2.4 GHz Transceiver Antenna

FreeSpeak II Wireless Solutions



Linking
People
Together



FreeSpeak II 2.4 GHz Transceiver Antenna

Key Features and Benefits

- Functions with FSII base, FreeSpeak Edge base, Arcadia Central Station, E-IPA-HX cards, and FSII splitter hardware
- Supports 4 FSII-BP24 beltacks per FSII-TCVR-24 transceiver
- Supports systems with up to 65-90 beltacks when mixed with FSII-TCVR-19s
- Blue LED status indicator on top and bottom
- Mic stand or wall mount orientation (metric and imperial threads)
- IP53 rating for wet and dusty conditions

FreeSpeak II is a high performance wireless solution operating in the 1.9 and 2.4 GHz frequency bands designed for extensive communication in large-scale operations.

Description

The FSII-TCVR-24 is an active transceiver antenna for the FSII-BP24 beltacks. The antenna can be locally powered or powered via the FSII-BASE or matrix on shorter connections (less than 1000 ft). The FSII-TCVR-24 has a mount for wall or microphone stand. A blue status light is visible from either mounting orientations. When mixed with FSII-TCVR-19 antennas, a single radio space can support up to 65-90 FreeSpeak II 1.9 GHz or 2.4 GHz beltacks.

Durability

The FSII-TCVR-24 is IP53 rated for wet weather or dusty conditions making them ideal for outdoor productions.

FreeSpeak II 2.4 GHz Transceiver Antenna

FreeSpeak II Wireless Solutions

Capacity Chart

	Max Beltpacks	Max TCVRs	Max BPs per TCVR
FreeSpeak II Base II 5Up	5	2 (E1) 10 (via 2 FSII-SPL)	4 (E1)
FreeSpeak II Base II	25	2 (E1) 10 (via 2 FSII-SPL)	4 (E1)
FreeSpeak Edge Base	16	2 (E1) 10 (via 2 FSII-SPL)	4 (E1)
Arcadia Central Station	64	2 (E1) 10 (via 2 FSII-SPL)	4 (E1)
Eclipse HX (via E-IPA Cards)	192 Delta 200 Median/Omega	30 Delta (via 6 FSII-SPL) 40 Median (via 8 FSII-SPL) 50 Omega (via 10 FSII-SPL)	4 (E1)

*Note: Each E-IPA Card supports up to 50 beltpacks with 10 E1 Transceivers using 2 Splitters

Technical Specifications

Frequency Spectrum: 2.400-2.483MHz for EU and US Cellular auto roaming technology

Modulation: GFSK, TDMA frame 10ms Full slot

Output power: (EU): 18dBm, (RoW): 22dBm

Environmental

IP53 water and dust resistance

Operating: 32°-125°F (0°-50°C)

Storage: 32°-150°F (0°-70°C)

Humidity: Between 20% and 90%, Non-Condensing

Dimensions

7 x 5.7 x 2in (HxWxD)

(178 x 144.8 x 51mm)


Weight

15.7oz (0.45kg)

FreeSpeak II 2.4 GHz Transceiver Antenna

FreeSpeak II Wireless Solutions

FSII-TCVR-24 Bottom Panel

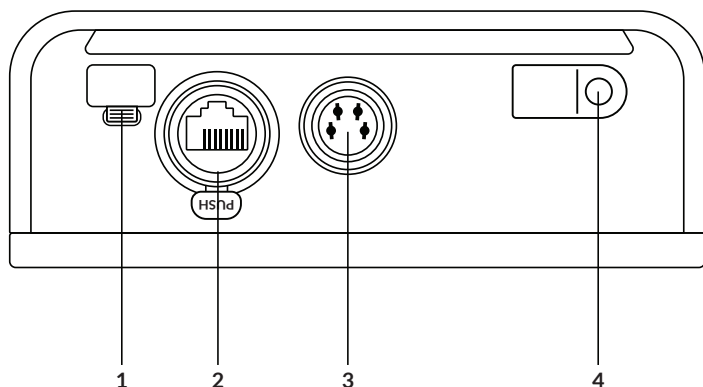

Legend

1. USB (factory)
2. Ethercon RJ-45 (base/matrix connection)
3. DC In
4. Mode button

Order Codes

FSII-TCVR-24: Active Antenna approved for use in USA, Canada and world wide sales except EU

FSII-TCVR-24-EU: Active Antenna approved for use in the EU



[www.clearcom.com/
freespeakii-knowledge-center/](http://www.clearcom.com/freespeakii-knowledge-center/)



www.clearcom.com

© 2024 Clear-Com LLC. All rights reserved. Clear-Com, FreeSpeak II and the Clear-Com logo are registered trademarks of Clear-Com LLC.

Notice About Specifications | While Clear-Com makes every attempt to maintain the accuracy of the information contained in its documentation, that information is subject to change without notice. Performance specifications included in this document are design-center specifications and are included for customer guidance and to facilitate system installation. Actual operating performance may vary.

WARNING: Cancer and Reproductive Harm - www.P65Warnings.CA.Gov