

S-MOUNT Enclosure

Digital Partyline Solutions

Linking
People
Together



S-MOUNT with HKB-2X*

Key Features and Benefits

- For use with HelixNet HKB-2X speaker stations
- Connects to main station over mic or Ethernet cable
- Powered by Powerline, third-party PoE power source, or AC/DC adapter (universal)

HelixNet is a digital partyline system with up to 24 channels of full-duplex audio and program audio over any shielded twisted-pair cable.

Description

The S-MOUNT is a desktop or surface mounting kit for the HKB-2X with adjustable angles for best viewing. The rear plate has an XLR-3M/F loop-thru and one RJ-45 LAN connector for connecting to the intercom. Optional power methods include Powerline (XLR intercom connection), Power-over-Ethernet (RJ-45 Ethernet intercom connection via third-party power source), or universal AC/DC power supply.

Raised sides protect the knobs of the HKB-2X speaker station from impact. Mounted speaker stations can be carried face-to-face if needed due to keyed lugs for easy stacking. Anti-slip feet help prevent movement when using the S-MOUNT on a desktop. For temporary setup, the screw holes provided on the S-MOUNT allow simple and quick surface mounting.

Technical Specifications

Connectors

Intercom Line: (1) 3-pin XLR-M, (1) 3-pin XLR-F

DC Power: 3-pin to AC adapter (provided)

Ethernet/PoE: RJ-45

PSU: 3-pin

Main Power

Via AC Adapter: AC Adapter Power

Connector: IEC60320-1-C14

Via Power over Ethernet (PoE):

Connector: RJ-45

Environmental

32° - +104°F (0° - +40°C)

90% relative humidity

Dimensions

Minimum (Closed):

3.9 x 10.4 x 6.7 in (HxWxD)

(99 x 265 x 170 mm)

Maximum (Open):


6.9 x 10.4 x 6.7 in (HxWxD)

(175 x 265 x 170 mm)


Weight

2.8 lbs (1.2 kg)


S-MOUNT Views (HKB-2X sold separately)

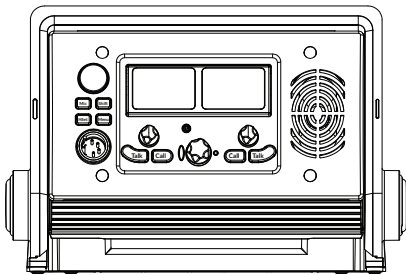

Front View

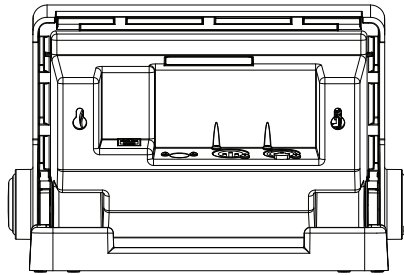


Rear View

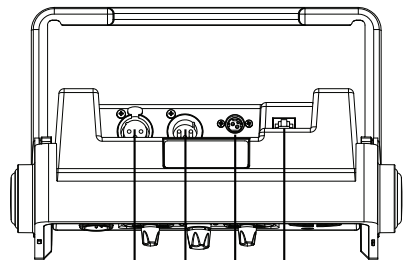

Top View

1 2 3 4



Side View

5

Legend

Front

1. 3-pin XLR-F connector
2. 3-pin XLR-M connector
3. Power connector (AC/DC power only)
4. Ethernet connector
5. Angle adjust button (both sides)

Order Code

S-MOUNT