



Avalon IP Station

Avalon IP Station

Intercom System Core

Key Features and Benefits

Avalon IP Station

- Combined Wired and Wireless Intercom
- Keypanels with Essential feature set
- I.V. Direct Clear-Com Global Interfacing
 - LQ
 - Eclipse E-IPA
 - Arcadia, Avalon
- Local Dante Interfacing
- CCM™ browser setup, configuration & monitoring
- Scalable Licensed Port capacity

Capacity

- FreeSpeak Wireless Intercom
 - (32) IP Transceivers (1.9, 5 GHz)
 - (64) Beltpacks (1.9, 5 GHz)
- HelixNet Wired Intercom
 - (≤24) Enabled Channels¹
 - (24) Powerline Devices
 - (128) User Stations (Beltpack, Speaker- & Remote)
- V-Series⁴ Keypanel Essential Features
 - (32) AES67 Connected^{1, 2}
 - (≤32) I.V. Connected^{1, 2}
- I.V. Direct Clear-Com Interface
 - (≤32) I.V. Direct Ports¹
- Dante Audio Network Interfaces
 - (64) Dante Ports¹

Configuration

- (200) Licensed Ports¹
 - FreeSpeak Beltpack
 - HelixNet Enabled Channel
 - V-Series Keypanel
 - I.V. Direct Port
 - Dante Port
- (100) Channels
- (100) Groups
- (100) IFB
- (300) Roles: FreeSpeak, HelixNet & V-Series

Connectivity

- (4) LAN - (2) RJ45, (2) SFP; Assignable to management (with HelixNet & I.V. Connectivity), AES67/AoIP, Dante Primary & Secondary

Avalon® IP Station is a 1RU, scalable base station with FreeSpeak® wireless, HelixNet® wired, and V-Series IrisX keypanels along with I.V. Direct and Dante interfaces.

Description

Avalon IP Station is a networked intercom system core supporting all types of intercom user stations from FreeSpeak Wireless Beltpacks, HelixNet Wired User Stations, and V-Series Keypanels. Coupled with Clear-Com's LQ Series analog and digital interfaces, I.V. Direct, and Dante interfacing, Avalon fits any networked infrastructure, locally and globally. Avalon's CCM browser configured Essential features are optimized for efficient intercom deployments, right sized with licensing & field upgrades as needs grow.

The Avalon IP Station and Arcadia Central Station are a family of highly capable intercom system cores.

Technical Specifications

Licenses

Delivery: License Ticket, may include multiple licenses

License Host: Avalon

Activation: Via CCM, Online (recommended) or Offline

Transferable: No, fixed to Avalon

Recovery: Yes, by Clear-Com Support or Service Center

Permanent Licenses

Part number: ARC-AVA-8P-LIC, ARC-AVA-16P-LIC

Capability: Additional 8 or 16 Licensed Port Upgrade Option

Validity: Perpetuity. Does not expire

Note: Licensed Port capacity is ordered with Avalon. ARC-AVA-8P-LIC and ARC-AVA-16P-LIC allow upgrade of Avalon capacity in the field.

Connectors

LAN: (2) RJ45, (2) SFP (Function assignable)

AC Power Connector: IEC-C14

DC Power Connector: KPJX-4S-S

Grounding Screw: Terminal

Note: While mechanically identical, SFPs are designed with different properties for data rates, power and fiber cable type. Please refer to the Clear-Com [SFP Compatibility Chart](#) for compatible SFP transceivers.

Controls and Indicators

Front Panel:

(1) Color Touch Screen Display

(2) Power Supply Status LED

(1) Encoder for Menu

(1) Reset button - For service use

Rear Panel:

(2) LAN RJ45 Link/Activity LEDs

¹Requires Avalon with sufficient number of Licensed Ports and an appropriate Device Allocation configuration.

²V-Series Iris and IrisX keypanels fully support all Avalon features while original V-Series has limited support using I.V. ports. Non-Iris desktop panels can be configured using the 12 key 1RU Role layout. Non-Iris cannot be upgraded from Avalon, requiring alternative methods. Expansion panels are not supported on Avalon.

Avalon IP Station

Intercom System Core

Technical Specifications (Continued)

Frequency Response

FreeSpeak Edge: 200Hz to 12kHz
FreeSpeak II & Icon: 200Hz to 7.1kHz
HelixNet: 200Hz to 10kHz
V-Series (AES67): 20Hz-20kHz
V-Series (I.V. Port): 50Hz-7.1kHz
I.V. Direct: 50Hz to 7.1kHz
Dante: 20Hz to 20kHz

Power

AC Internal Power Supply:
Input Voltage Range: 100 - 240V AC
Input Frequency Range: 50 - 60Hz
Input Power (Max): 160W
BTU (Max): 545BTU/h
Input Power Connector: IEC-C14

DC Power Input:
Voltage: 12V DC $\pm$ 5%
Current (Max): 12A
Power (Max): 144W
BTU (Max): 491BTU/hr
Input Power Connector: KPJX-4S-S

This unit can be powered via DC input using:

AC Adapter - Inline:
Type: PSU-EXT-001 (supplied)
Mounting Bracket: 272G048-SP (optional)
Input Voltage Range: 100 - 240V AC
Input Frequency Range: 50 - 60Hz
Input Power Connector: IEC-C14
Output Voltage: 12V DC $\pm$ 5%
Output Current (Max): 12.5A
Output Power (Max): 150W
Output Power Connector: KPPX-4-P

Environmental

Operating: 32° to 113°F (0° to 45°C)
Storage: -22° to 158°F (-30° to 70°C)
Humidity: 20-90% Non-Condensing

Dimensions

1RU
19 x 1.7 x 13.9in (WxHxD)
(482.6 x 43.2 x 353.1mm)

Weight

~5.5 lbs (~2.5 kg)

**PRELIMINARY PRODUCT
INFORMATION**

Avalon IP Station

Intercom System Core

Network Specifications | Firmware Release 4+

Avalon includes 4 physical LAN connections (2 x RJ45, 2 x SFP) which can be assigned to different functions. This allows various network setups, from converged to having physically separate network per function.

Administration

For CCM Management, Control and License Activation

Network Protocols

Ethernet IPv4–Unicast Control
DCHP–Dynamic IP Addressing
mDNS–Multicast Device Discovery
HTTP–Management
HTTPS–Secured Management
NTP–Network Time Protocol

Network Ports

Unicast:

Ports 67, 68 UDP–Dynamic IP Addressing
Port 80 TCP–Web Interface, System Management
Port 123 UDP–Time Stamps for Service Logs
Port 443 TCP - Secured Web interface, System Management
Port 22350 TCP – Online License Activation

Network Parameters

MAC Address Prefix: 00:0e:98:....

Link-Local Default IP Address Range: 169.254.0.0/16

System Reserved IP Ranges:

10.0.0.0-7 Internal Systems
127.0.0.0/8 Local Host
169.254.0.0/16 Link Local
172.23.0.0/16 Link Group
224 -239.0.0.0/8 Multicast

Above addresses cannot be assigned.

Restrictions: Do not plug any two physical LAN ports on Avalon into the same network/ VLAN. This can create a network loop affecting IP stability.

Recommended Ethernet Switches:

- Managed Ethernet Switch
- 100/1000 Base-T Ports
- 1000 Base IP Switch Trunks
- QoS Configuration
- Energy Efficient Ethernet bypass option
- GMP Snooping options

Avalon IP Station

Intercom System Core

Network Specifications | Firmware Release 4+

Avalon includes 4 physical LAN connections (2 x RJ45, 2 x SFP) which can be assigned to different functions. This allows various network setups, from converged to having physically separate network per function.

AES67

For FreeSpeak IP Transceivers and V-Series Iris Keypanels

Network Protocols

Ethernet IPv4 – Unicast Audio & Control
DCHP – Dynamic IP Addressing
DNS-SD – Service Discovery
mDNS – Multicast Device Discovery
Layer 2 Non-Routable
HTTP – Management
PCM – Audio Codec to Transceivers and Keypanels
DiffServ – QoS
IGMPv3 – Multicast Management
PTPv2 – Synchronization
SDP – Session Description Protocol
RTP – Real Time Protocol
SAP – Session Announce Protocol
RTSP – Real Time Streaming Protocol

Network Ports

Unicast:

Ports 67, 68 UDP – Dynamic IP Addressing
Port 6001 TCP – System Connection
Port 9875 UDP – SAP/SDP advertisement
Port 15000-15525 UDP – Audio Media

Multicast:

IP 224.0.0.129 Ports 319, 320 – PTP Synchronization
IP 224.0.0.251 Port 5353 UDP – mDNS, Names, Discovery, Pairing

Network Parameters

FS IP Transceiver Support: 32

V-Series Iris Keypanel Support: 32

PTP Leader: 20 PTP Followers. Use external Leader or BC for larger systems.

Bandwidth:

FS II IPT Transceiver: ~7 Mbps (max) each

FS Edge Transceiver: ~ 9.6Mbps (max) each

V-Series Iris Keypanel: ~ 5 Mbs (max) each

Network Jitter Tolerance

FS IP Transceivers: < 1µs required for RF Synchronization

V-Series Iris Keypanel: < 2ms @ 125µs package

QoS Tags:

Clock: DSCP=46, Expedited Forwarding (EF)

Media: DSCP=34, Assured Forwarding (AF41)

Management: DSCP=0, Best Effort (DF)

PTP Parameters: (Device hard coded)

Sync: PTP v2 (IEEE 1588-2) (target offset ±100 ns)

PTP domain: 0

Priority 1: 127

Priority 2: 128

Announce interval: +1 (2s) (1/2s)

Sync Rate: -3 (125ms) (1/8s)

Package Size: 125µs

MTU: Jumbo frames ≥ 9000 bytes (recommended)

Media Profile: AES67

IGMP: Snooping Enabled & Querier on Network

Multicast: Enabled

MAC Address Prefix: 00:0e:98:....

Link-Local Default IP Address Range: 169.254.0.0/16

System Reserved IP Ranges:

10.0.0.0-7 Internal Systems

127.0.0.0/8 Local Host

169.254.0.0/16 Link Local

172.23.0.0/16 Link Group

224 - 239.0.0.0/8 Multicast

Above addresses cannot be assigned.

Restrictions: Cannot be combined with Dante. Recommended use with assigned IP addresses. Cannot be on Management subnet unless on same physical LAN port. Static or DHCP assigned IP addresses are recommended for FreeSpeak IP Transceivers.

Further Details: Refer to the [AES67 Network Recommendations](#) for further information, for network performance and use on converged networks.

Avalon IP Station

Intercom System Core

Network Specifications | Firmware Release 4+ (Continued)

HelixNet

For Networked Partyline Intercom

Network Protocols

Ethernet IPv4–Unicast Audio & Control

DCHP–Dynamic IP Addressing

mDNS–Multicast Device Discovery

Layer 3 routable with mDNS function limitations

HTTP–Management

TFTP–File Transport Protocol

NTP–Network Time Protocol

I.V. Core–Decentralized Network Routing & Mixing

IVP–Proprietary intercom Audio and Control

WavPack–Audio Codec

Network Ports

Unicast:

Ports 67, 68 UDP–Dynamic IP Addressing

Port 69 UDP–Firmware File Server

Port 80 TCP–Web Interface, System Management, Expansion

Port 123 UDP–Time Stamps for Service Logs

Port 6001 TCP–System Management

Port 6001 UDP–Audio Streams

Multicast:

Port 5353 UDP–mDNS, Names, Discovery, Pairing, Expansion

Optional for device names and pairing; Mandatory for RM Expansion

Network Parameters

HelixNet User Station Support: 128

Bandwidth:

300-600 (max) kbps from each HelixNet User Station

1200-2400 (max) kbps from Avalon to each HelixNet User Station

Network Jitter Tolerance: <= 128ms jitter buffer per audio stream receiver automatically adjusted to network performance

QoS Tags: DSCP=34, Assured Forwarding (AF41)

MAC Address Prefix: 00:0e:98:....

Link-Local Default IP Address Range: 169.254.0.0/16

System Reserved IP Ranges:

10.0.0.0-7 Internal Systems

127.0.0.0/8 Local Host

169.254.0.0/16 Link Local

172.23.0.0/16 Link Group

224 -239.0.0.0/8 Multicast

Above addresses cannot be assigned

Restrictions: Fixed to Management LAN port. Possible combinations on physical LAN ports is pending a future Avalon release. Contact Clear-Com.

Further Details: Refer to the [HelixNet Network Guide](#) for further information

I.V. Port

For Clear-Com Device Interconnectivity over LAN/WAN/Internet

Network Protocols

Ethernet IPv4–Unicast Audio & Control

DCHP–Dynamic IP Addressing

Layer 3–IP Routable

DNS–Domain Name Server

IVP–Proprietary intercom Audio and Control

G722–Audio Codec

AES-128–Audio and Control Encryption

Network Connectivity: Ethernet, Wi-Fi, 3G, 4G, LTE (as available on 3rd-party infrastructure)

Network Ports

Unicast:

Ports 67, 68 UDP–Dynamic IP Addressing

Ports 6001 (configurable as caller) TCP–System Management

Port 6001 (configurable as caller) UDP–IVP Audio Streams

Ports 6002 (fixed) TCP–System from LQ, V-Series, E-IPA, Arcadia, Avalon

Port 6002 (fixed) UDP–IVP Audio from LQ, V-Series, E-IPA, Arcadia, Avalon

Multicast:

No multicast ports are used for I.V. Port

Audio

Audio Encoding: G.722 Fixed Wideband 7kHz within 64kbit/s

Frequency Response: 50Hz-7kHz

Silence Suppression: Optional in LAN & WAN modes. Enabled in Internet mode.

Network Parameters

Resource Use:

Avalon, Arcadia: 1 Licensed Port

Eclipse: 1 Port on IPA/IVC card

LQ: 4 (See LQ Resource Estimator)

Bandwidth:

140 kbps to/from Avalon

With far-end silence suppression & bi-directional forward error correction

Package size:

LAN: 8ms

WAN: 24ms

Internet: 40ms

Network Jitter Tolerance: Rx: Selectable

LAN: <=12ms

WAN: <= 120ms

Internet: <=200ms

Forward Error Correction: Enabled in Internet mode

Encryption: AES-128 enabled in WAN & Internet modes

QoS Tags: DSCP=34, Assured Forwarding (AF41)

MAC Address Prefix: 00:0e:98:....

Link-Local Default IP Address Range: 169.254.0.0/16

System Reserved IP Ranges:

10.0.0.0-7 Internal Systems

127.0.0.0/8 Local Host

169.254.0.0/16 Link Local

172.23.0.0/16 Link Group

224 -239.0.0.0/8 Multicast

Above addresses cannot be assigned

Network Specifications | Firmware Release 4+ (Continued)

Dante (Firmware Version 4.2)

For 3rd Party Audio Networking

Network Protocols

Ethernet IPv4-Unicast/Multicast Audio & Control

DCHP-Dynamic IP Addressing

mDNS-Multicast Device Discovery

PCM-Audio Codec

DiffServ-QoS

PTPv1 – Synchronization

SAP-Session Announce Protocol

RTP-Real Time Protocol for AES67

Network Ports

Unicast:

Ports 67, 68 UDP-Dynamic IP Addressing

Ports 14336-14591 UDP-Audio

Port 4440 UDP-Audio Control

Port 4444 UDP-Audio Control

Port 4455 UDP-Audio Control

Port 8751 UDP-Dante Controller

Port 8800 UDP-Control & Monitoring

Multicast:

IP 224.0.0.251 Port 5353 UDP-mDNS, Names, Discovery

IP 224.0.1.129-132 Ports 319-320 UDP-PTP

IP 239.254.3.3 Port 9998 UDP-PTP

IP 239.255.0.0/16 Port 4321 UDP-Audio

IP 224.0.0.230-233 Ports 8700-8708 UDP-Control

IP 239.69/16 Port 5004 UDP (default) -RTP/AES67 Audio

IP 239.255.255.255 Port 9875 UDP-AES67 Discovery

Network Parameters

Audio: 24 bit, Linear, 48kHz

Bandwidth:

6 Mbps per 4 channel unicast flow

1.5 Mbps per multicast channel

Network Jitter Tolerance: Dependent on Dante latency configuration

QoS Tags:

Clock: DSCP=56, Control (CS7)

Media/Clock: DSCP=46, Expedited Forwarding (EF)

Other: DSCP=0, Best Effort (DF)

IGMP: Enabled for multicast use

Multicast: Enabled for multicast use

Link-Local Default IP Address Range:

169.254.0.0/16 Primary

172.32.0.0/16 Secondary

Restrictions:

Cannot be combined with AES67.

Primary and Secondary cannot be assigned to same physical LAN port.


Further Details:

Refer to documentation from [Audinate](#) for further information.

Avalon IP Station

Intercom System Core

Front

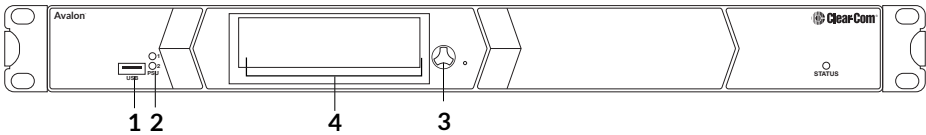

Rear



Legend

Front

1. USB A
2. PSU LED indicators
3. Rotary encoders
4. Touchscreen display

Rear

1. Power Input - AC
2. Power Input - DC
3. LAN ports
4. LAN SFP ports

Order Codes

- AVALON-16P
- AVALON-32P
- AVALON-48P
- AVALON-64P
- AVALON-80P
- AVALON-96P
- AVALON-112P
- AVALON-128P
- AVALON-144P
- AVALON-160P
- AVALON-176P
- AVALON-192P
- AVALON-200P

Includes:

- (1) External PSU (PSU-EXT-001)

Licensed Port Upgrades

- ARC-AVA-8P-LIC
- ARC-AVA-16P-LIC

Optional Parts

- SFP-MMFO-1G-SX: Multi-mode LAN SFP
- SFP-SMFO-1G-LX: Single-mode LAN SFP
- SFP-RJ45-1G: RJ45 LAN SFP
- 272G048-SP: PSU Mounting Bracket



**PRELIMINARY PRODUCT
INFORMATION**



www.clearcom.com
© 2026 Clear-Com LLC. All rights reserved.
Clear-Com, FreeSpeak II, Eclipse HX and the Clear-Com logo
are registered trademarks of Clear-Com LLC.

Notice About Specifications While Clear-Com makes every attempt to maintain the accuracy of the information contained in its documentation, that information is subject to change without notice. Performance specifications included in this document are design-center specifications and are included for customer guidance and to facilitate system installation. Actual operating performance may vary.

WARNING: Cancer and Reproductive Harm - www.P65Warnings.CA.Gov